



Security on. Wasted light off.

Motion detectors and night lights.

In the garden, in the hallway or in the dreams: Goobay motion detectors in combination with lamps or as night lights provide more safety - from dangerous trip hazards, burglars or creepy dark corners. Whether indoors or outdoors, on the wall or in the ceiling: they are easy to install and their sensor can be set individually. For just the right brightness and against the question: Is the light in the hallway still on?



OUTDOOR MOTION DETECTORS





Goobay

Motion Detector, Tiltable

for surface-mounted wall installation, 140° detection, 12 m range,
for outdoor use (IP44), LED-compatible

- Flexible adjustment: The infrared sensor tilts up and down by 90° for optimised alignment
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) can be easily and continuously adjusted using the rotary control on the underside
- Suitable for connecting LED lighting and energy-saving bulbs up to 600 W and incandescent bulbs up to 1200 W
- Ideal for surface-mounted wall installation (mounting materials included), installation height: 1.80 m to 2.50 m
- Splash protection according to protection class IP44, making it suitable for use in outdoor areas and damp rooms
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Practical for monitoring outdoor areas such as carports, house entrances, driveways or gardens



black	79590	Retail Box
white	79589	Retail Box

RRP	9.99 €
RRP	9.99 €



Detection

Max. 12 m

Auto light off



Goobay

Motion Detector, tiltable/swivelling


for surface-mounted wall installation, 180° detection, 12 m range,
for outdoor use (IP44), LED-compatible

- Flexible adjustment: The infrared sensor swivels up to 130° and tilts up to 30° for optimised alignment
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) can be easily and continuously adjusted using the rotary control on the underside
- Suitable for connecting LED lighting and energy-saving lamps up to 400 W and incandescent lamps up to 800 W
- Ideal for surface-mounted wall installation (mounting materials included), installation height: 1.80 m to 2.50 m
- Splash protection according to protection class IP44, making it suitable for use in outdoor areas and damp rooms
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Practical for monitoring outdoor areas such as carports, house entrances, driveways or gardens



black	79592	Retail Box
white	79591	Retail Box

RRP	11.99 €
RRP	11.99 €

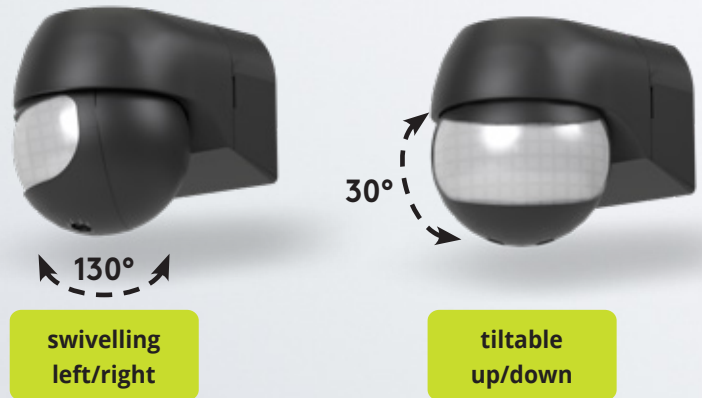



Goobay

2-Zone Motion Detector, Tiltable/Swivelling

for surface-mounted wall installation, 180°/360° detection, 12 m range, for outdoor use (IP44), LED-compatible

- Double flexibility: With 2 infrared sensors for horizontal (180°) and vertical detection (360°). The head joint can be swivelled up to 150° and tilted up to 45° for optimised alignment.
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) can be easily and continuously adjusted using the rotary control on the underside
- Suitable for connecting LED lighting and energy-saving lamps up to 600 W and incandescent lamps up to 1200 W
- Ideal for surface-mounted wall installation (mounting materials included), installation height: 1.80 m to 2.50 m
- Splash protection according to protection class IP44, making it suitable for use in outdoor areas and damp rooms
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Practical for monitoring outdoor areas such as carports, house entrances, driveways or gardens



black	79597	Retail Box
white	79593	Retail Box

RRP	15.99 €
RRP	15.99 €




INDOOR MOTION DETECTORS



Goobay

Motion Detector Slim, white

for surface-mounted ceiling mounting, 360° detection, 8 m range,
for indoor use (IP20), LED-compatible



- Discreet look, easy operation: The cover can be easily twisted off to adjust the light sensitivity and switch-off delay even after installation – without dismantling or screwing
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) are easily and continuously adjustable behind the removable cover with the rotary control
- Perfect for LED lighting as part of home automation or indoor security systems
- Replaces the light switch and switches without contact: particularly practical in rooms where you enter with your hands full, e.g. hallways or utility rooms
- Suitable for connecting LED lighting and energy-saving lamps up to 400 W and incandescent lamps up to 800 W
- With a detection angle of 360°, ideal for surface-mounted ceiling installation, installation height: 2.20 m to 4 m
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark


79605 Retail Box

RRP 14.99 €



Reliable In The Dark

replaces the light switch

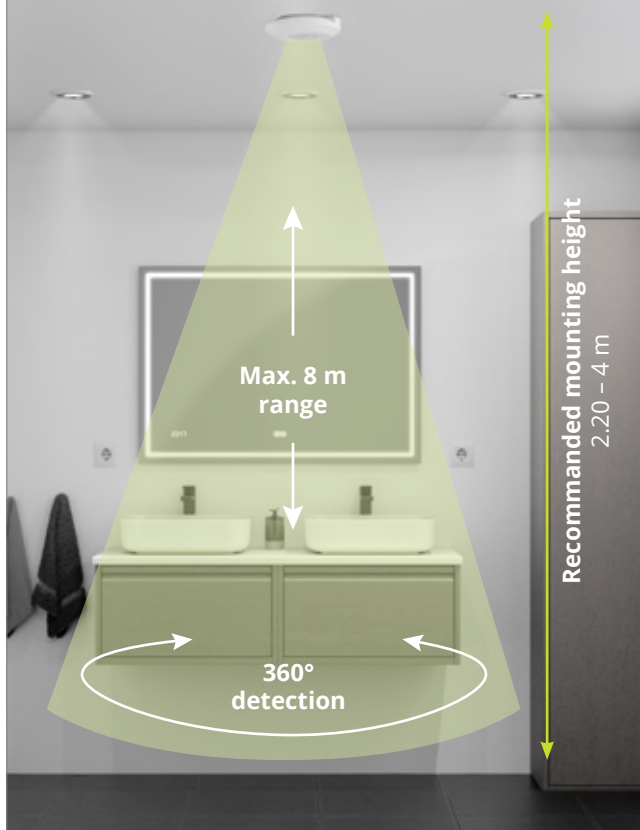

Super Slim Design

as flat as flush-mounted, as flexible as surface-mounted



Extra-flat surface mounting



Auto light off

Setting Via Rotary Control

discreetly installed behind the removable front panel

Convenient
still adjustable
when installed

Cable entry
optionally at the rear or side



TIME: Switch-off delay
variable from 10 seconds to 15 minutes



LUX: Light sensitivity
variable from 3 to 2000 lx



Goobay

2-in-1 Motion Detector, white

for surface and flush mounting, 360° detection, 8 m range,
for indoor use (IP20), LED-compatible

- Suitable as a flexible 2-in-1 solution for flush-mounted and surface-mounted installation, including brackets and canopy for the respective installation options
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) are easily and continuously adjustable behind the removable cover using a rotary control
- Discreet appearance, easy to use: The rotary controls for light sensitivity and switch-off delay are located under the removable cover to adjust the settings at any time – without dismantling and without tools
- Suitable for connecting LED lighting and energy-saving bulbs up to 600 W and incandescent bulbs up to 1200 W
- With a detection angle of 360°, ideal for flush-mounted ceiling installation, installation height: 2.20 m to 4 m
- Perfect for LED lighting as part of home automation or indoor security systems (protection class IP20)
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark




79602 Retail Box

RRP 13.99 €



Reliable In The Dark replaces the light switch

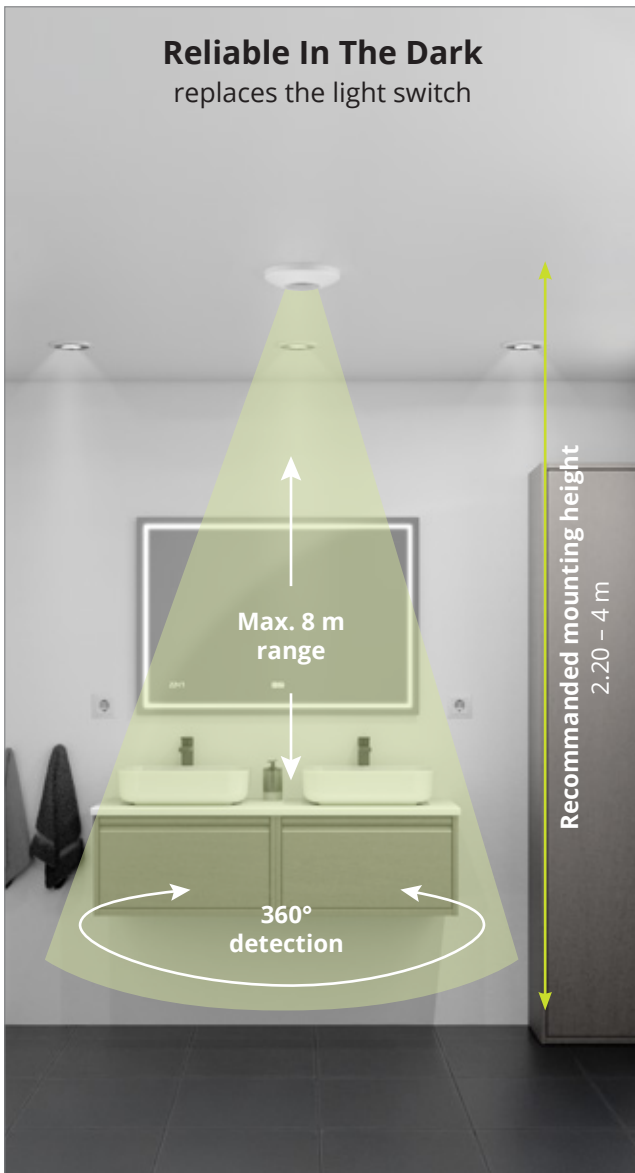

Maximum Flexibility with 2 installation options

Flush-mounting



Super slim installation
only 1.5 cm flat when mounted

Surface-mounting



Clean, smooth appearance
cover cap included



Setting Via Rotary Control

discreetly installed behind the removable front panel



Convenient
still adjustable
when installed



TIME: Switch-off delay
variable from 10 seconds to 15 minutes



LUX: Light sensitivity
variable from 3 to 2000 lx

*Depicted without front cover

Goobay

Compact Motion Detector, white

for flush-mounted ceiling installation, 360° detection, 8 m range,
for indoor use (IP20), LED-compatible



- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 15 min) are easily and continuously adjustable using a rotary control
- Discreet appearance, easy to use: The rotary controls for light sensitivity and switch-off delay are located under the sliding cover to adjust the settings at any time – without dismantling and without tools
- Suitable for connecting LED lighting and energy-saving bulbs up to 600 W and incandescent bulbs up to 1200 W
- With a detection angle of 360°, ideal for flush-mounted ceiling installation, installation height: 1.80 m to 4 m
- Perfect for LED lighting as part of home automation or indoor security systems (protection class IP20)
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Particularly practical in rooms that you enter with your hands full, e.g. hallways or utility rooms




79598 Retail Box

RRP 11.99 €



Reliable In The Dark

replaces the light switch

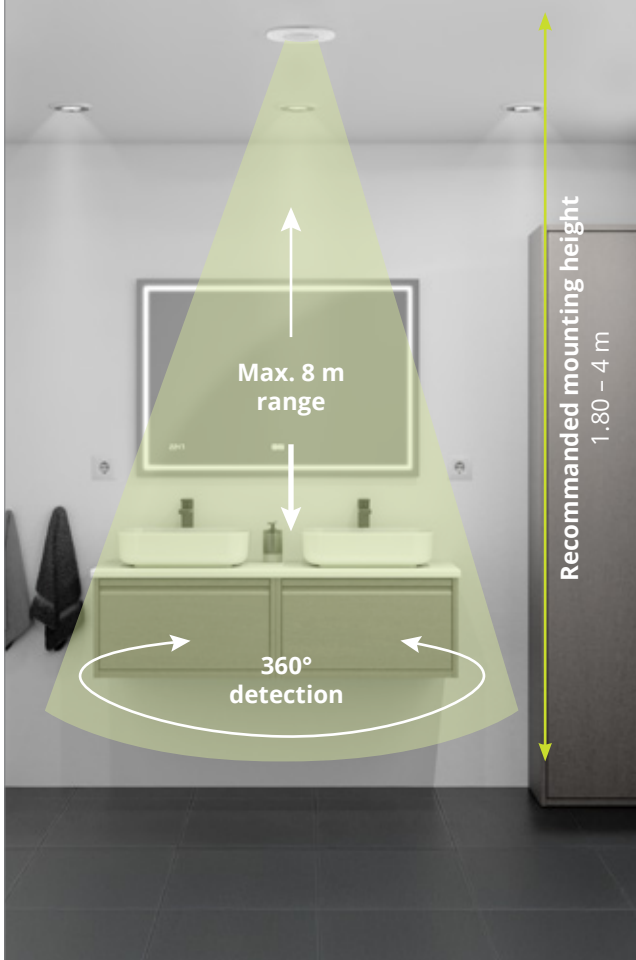

Discreet Design

extra-flat installation

Clamps

for secure mounting in the ceiling

Super slim installation
frame only 3 mm thick



Auto light off

Setting Via Rotary Control

discreetly located behind the sliding cover

Convenient
still adjustable
when installed



TIME: Switch-off delay

variable from 10 seconds to 15 minutes



LUX: Light sensitivity

variable from 3 to 2000 lx




Goobay

Motion Detector, white

for flush wall mounting, 160° detection, 9 m range, for indoor use (IP20)

- Can be used as a motion detector or as a regular light switch thanks to the switch with 3 modes: On, Off and PIR
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 7 min) are easily and continuously adjustable behind the cover with the rotary control
- Suitable for connecting LED lighting and energy-saving bulbs up to 200 W and incandescent bulbs up to 500 W
- Ideal for horizontal and vertical installation in flush-mounted or cavity wall boxes, installation height: 1.00 to 1.80 m
- Perfect for LED lighting as part of home automation or indoor security systems (protection class IP20)
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Particularly practical in rooms that you enter with your hands full, e.g. hallways or utility rooms



79603 Retail Box

RRP 11.99 €



Reliable In The Dark

replaces the light switch



Minimalist Design

compatible with many switch ranges

Clamps
for secure mounting in the ceiling



Super slim installation
frame only 3 mm thick



Setting Via Rotary Control

discreetly located behind the front cover




TIME: Switch-off delay
variable from 10 seconds to 7 minutes



LUX: Light sensitivity
variable from 3 to 2000 lx



3 modes: On, Off, PIR
can be used flexibly as a motion detector or normal light switch

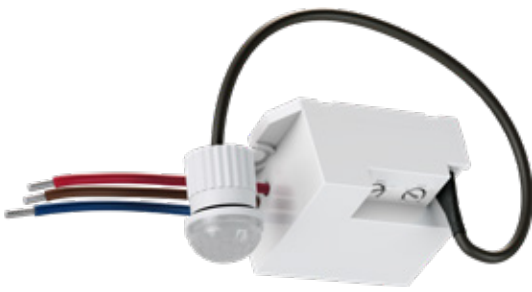

Goobay

Mini Motion Detector

for flush ceiling mounting, 360° detection, 6 m/8 m range,
for indoor use (IP20), LED-compatible

- The sensor has a range of 8 m when mounted on a wall and 6 m when mounted on a ceiling
- Light sensitivity (3 lx to 2000 lx) and switch-off delay (10 s to 8 min) are easily and continuously adjustable behind the cover with the rotary control
- Suitable for connecting LED lighting and energy-saving bulbs up to 400 W and incandescent bulbs up to 800 W
- With loose cable ends and two mounting eyelets on the controller unit for easy screw-in mounting in flush-mounted boxes, in the ceiling or in cavity walls
- With a detection angle of 360°, ideal for surface-mounted ceiling installation, installation height on wall: 1.80 m to 2.50 m, installation height on ceiling: 2.20 m to 4 m
- The PIR sensor reacts to the movement of people or animals and activates the connected lighting when it is dark
- Replaces the light switch and switches without contact: Particularly practical in rooms that you enter with your hands full, e.g. hallways or utility rooms

Ceiling mounting



Wall mounting



79604 Retail Box

RRP 9.99 €




Discreet Design

controller unit is concealed behind the wall

Mounting holes

for screwing into flush-mounted boxes and cavity walls

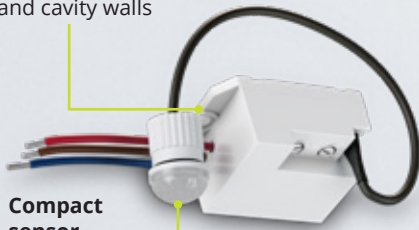

Compact sensor
only 1.8 cm in diameter



Detection



Max. 6/8 m




Auto light off

Setting Via Rotary Control

discreetly attached to the controller unit




LUX: Light sensitivity
variable from 3 to 2000 lx

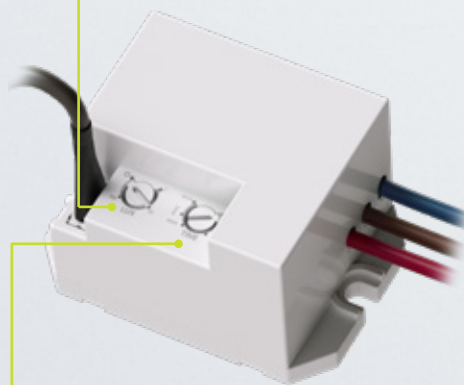

TIME: Switch-off delay
variable from 10 seconds to 8 minutes

Mini Design, Maximum Effect

compact format & excellent protection for your home

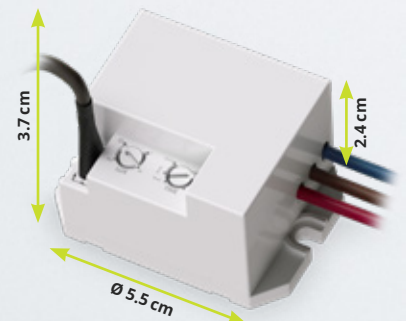

NIGHT LIGHTS WITH MOTION DETECTORS



Goobay

LED Night Light with Motion Detector

cool white (6500 K), 120° detection, 5 m range, for indoor use (IP20)



- The PIR sensor reacts to the movement of people or animals and activates the integrated LEDs when it is dark
- The LED night light reliably provides light in the bathroom, hallway, living room and children's room at night
- With a 120° monitoring angle and a range of 5 m, the plug-in wall light is perfect for use in home environments
- The LED night light is simply connected to the socket via Europlug and requires no programming
- As soon as there is no more movement in the detection area, the night light switches off automatically after 30 seconds
- Sensitivity (< 10 lm), range (5 m) and switch-off time (30 s) are preset, installation height: 0.25-1.50 m
- With protection class IP20, intended for indoor use only

96500 Retail Box

RRP 12.99 €



96501 Retail Box

RRP 12.99 €



LED Night Light with motion detector



9x LEDs with
40 lm brightness



6500 K
cool white



120° detection
5 m range



PIR sensor
(passive infrared)

Switches off after 30 sec.

as soon as no more movement is detected

9x LEDs

Colour temperature:
6500 K (cool white)
Brightness: 40 lm
Beam angle: 85°


max. detection range: 5 m

max. detection
angle: 120°

Europlug
type C, CEE 7/16

Good Visibility at Night

safe footing in dark rooms

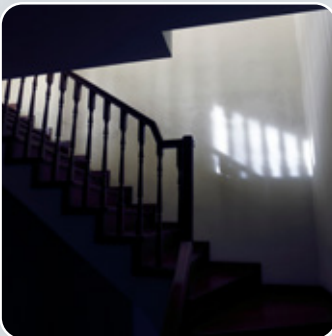

Switches on Reliably

for a safe feeling



Around steps &
stairs



In corridors



























In bedrooms











































In bathrooms*

*IP20 - not waterproof

OVERVIEW OF OUTDOOR MOTION DETECTORS

						
Article	79590	79589	79592	79591	79597	79593
Main distinction	Tiltable: up/down		Tiltable: up/down Swivelling: left/right		Tiltable: up/down Swivelling: left/right 2 detection areas	
Features	 PIR sensor, tiltable by up to 180°		 130° swivelling, 30° tiltable		 150° swivelling, 45° tiltable	
	 Up to 12 m range, 140° detection		 Up to 12 m range, 180° detection		 12 m range, 180° & 360° detection	
	 Max. 600 W LED & 1200 W incandescent		 Max. 400 W LED & 800 W incandescent		 Max. 600 W LED & 1200 W incandescent	
	 Splash protected with IP44 rating		 Splash protected with IP44 rating		 Splash protected with IP44 rating	
	 TIME: Switch-off delay variable from 10 s to 15 min		 TIME: Switch-off delay variable from 10 s to 15 min		 TIME: Switch-off delay variable from 10 s to 15 min	
	 LUX: Light sensitivity variable from 3 to 2000 lx		 LUX: Light sensitivity variable from 3 to 2000 lx		 LUX: Light sensitivity variable from 3 to 2000 lx	

OVERVIEW OF INDOOR MOTION DETECTORS

					
Article	79605	79602	79598	79603	79604
Construction type	Super slim only 25 mm	2-in-1 Surface- and flush-mounting	Compact/slim and easy to use	Flush mounting, manual operation also possible	Flush mounting, minimal dimensions
Main differences	 Super slim Design	 Surface- & flush-mounting	 Super slim Design	 3 modes: On, Off, PIR can be used flexibly as a motion detector or normal light switch	 Compact sensor with Ø 1.8 cm
Features	 PIR-Sensor, mit 360° Erfassung	 PIR sensor, with 360° detection	 PIR sensor, with 360° detection	 PIR sensor, with 160° detection	 Detection angle 120°/360°
	 Up to 8 m range, for indoor use	 Up to 8 m range, for indoor use	 Up to 8 m range, for indoor use	 Up to 9 m range, for indoor use	 6/8 m range, for indoor use
	 Max. 400 W LED & 800 W incandescent	 Max. 600 W LED & 1200 W incandescent	 Max. 600 W LED & 1200 W incandescent	 Max. 200 W LED & 500 W incandescent	 Max. 400 W LED & 800 W incandescent
	 For indoor use	 For indoor use	 For indoor use	 For indoor use	 For indoor use
	 TIME: Switch-off delay variable from 10 s to 15 min	 TIME: Switch-off delay variable from 10 s to 15 min	 TIME: Switch-off delay variable from 10 s to 15 min	 TIME: Switch-off delay variable from 10 s to 7 min	 TIME: Switch-off delay variable from 10 s to 8 min
	 LUX: Light sensitivity variable from 3 to 2000 lx	 LUX: Light sensitivity variable from 3 to 2000 lx	 LUX: Light sensitivity variable from 3 to 2000 lx	 LUX: Light sensitivity variable from 3 to 2000 lx	 LUX: Light sensitivity variable from 3 to 2000 lx