

S-Video Kabel

flexibles Verbindungskabel für anspruchsvolle Anwender

Bild für Bild rauscharm und farbtreu: So holen Sie das Optimum aus Ihrer Anlage heraus. Kein Wunder, denn durch die sauber getrennte Übertragung von Helligkeits- (Luminanz) und Farbinformationen (Chrominanz) sowie mehrfache Signalschirmung, reine Materialien, und präzise Verarbeitung bleibt kein Detail verborgen.

- 75 Ω definierter Wellenwiderstand
- reine Kupferleiter und 2-fach Schirmung für klare Signalqualität
- 24-Karat vergoldete Kontakte für minimale Übertragungswiderstände

Technische Daten

Anschlüsse	
Steckermaterial:	3-fach umspritztes PVC / ABS
Kontaktmaterial:	24-Karat-vergoldet
Schirmung:	ja
Anschluss 1, Typ:	Mini-DIN-Stecker (4-polig)
Anschluss 1, Steckerlänge (mm):	39,8
Anschluss 1, Steckerbreite (mm):	14,0
Anschluss 1, Steckerhöhe (mm):	14,0
Anschluss 2, Typ:	Mini-DIN-Stecker (4-polig)
Anschluss 2, Steckerlänge (mm):	39,8
Anschluss 2, Steckerbreite (mm):	14,0
Anschluss 2, Steckerhöhe (mm):	14,0

Kabel	
Typ:	Rundkabel
Länge (m):	1 2 3 5 7,5 10 15 20
Material Innenleiter:	OFC (sauerstofffreies Kupfer)
Durchmesser Innenleiter (mm):	9 x 0,120
AWG:	27
Anzahl Schirmungen:	2 x
Typ 1. Schirmung:	Aluminium-Folie
Typ 2. Schirmung:	Kupfer-Geflecht 64 Adern x 0,12 mm Querschnitt
Material Außenmantel:	hochelastisches PVC
Durchmesser Außenmantel (mm):	6,5
Knickschutz:	beidseitig

Signalübertragung	
Übertragungsarten:	analoge Videosignale
weitere unterstützte Standards:	Helligkeit (Luminanz), Farbe (Chrominanz)
Wellenwiderstand (Ω):	75

Allgemein	
Betriebstemperatur von / bis (°C):	-10 / +80
Garantie (Jahre):	10


casual




Mini-DIN-Stecker (4-polig)




Mini-DIN-Stecker (4-polig)



Kabelquerschnitt

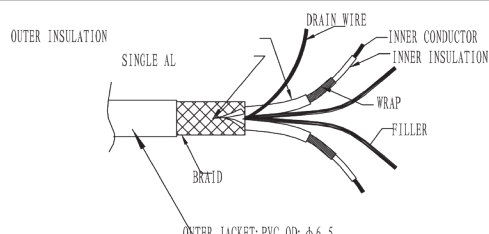

Schaltplan

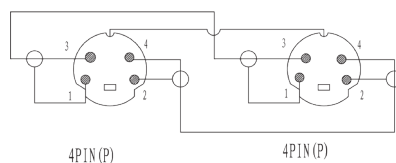

10 Years
Warranty
High-Quality
Assurance









OFC
99,99% Oxygen
Free Copper

24 Carat
Gold
Anti Resistance
Connections

2x
Cable
Shielding

S-Video Kabel

flexibles Verbindungskabel für anspruchsvolle Anwender

Artikelnr.	Kabellängen (m)	Verpackung (Maße in mm)	Gewicht (kg)	Abbildung	EAN Code
70432	1.00	Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235	Einzelkarton: 0.10 Export VPE: 5.00		4 040849 704321
70434	2.00	Einzelkarton: 185 x 80 x 35 Export VPE (30 Stk.): 400 x 270 x 235	Einzelkarton: 0.16 Export VPE: 5.80		4 040849 704345
70435	3.00	Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435	Einzelkarton: 0.26 Export VPE: 7.70		4 040849 704352
70436	5.00	Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435	Einzelkarton: 0.37 Export VPE: 10.50		4 040849 704369
70437	7.50	Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435	Einzelkarton: 0.52 Export VPE: 12.40		4 040849 704376
70438	10.00	Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435	Einzelkarton: 0.64 Export VPE: 15.40		4 040849 704383
70440	15.00	Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435	Einzelkarton: 0.93 Export VPE: 18.00		4 040849 704406
70441	20.00	Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435	Einzelkarton: 1.19 Export VPE: 22.80		4 040849 704413

TARIC-Code: 85444290900

Bei Clicktronic® werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI™-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI™-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI™ handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor.
Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig

S-video cable

flexible connection cable for demanding users

Every single image is virtually noiseless with true color: With this, you will get the most out of you system. Small wonder, because the cleanly separate transmission of brightness (luminance) and color information (chrominance), as well as multiple layers of signal shielding, pure materials, and precise processing, no detail remains hidden.

- 75 Ω defined characteristic impedance
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	Mini-DIN connector (4-pin)
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	Mini-DIN connector (4-pin)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable

Type:	Round cable
Length (m):	1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	9 x 0.120
AWG:	27
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil + drain
Type of 2nd shielding	Copper braid 64 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.5
Kink protection:	on both sides

Signal transmission

Transmission modes:	analog video signals
other supported standards:	Brightness (luminance), color (chrominance)
Characteristic impedance (Ω):	75

General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

clicktronic®

entertainment.
pure.


casual




Mini-DIN connector (4-pin)




Mini-DIN connector (4-pin)



Cross section

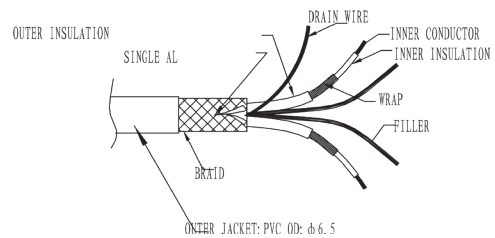

Wiring diagram

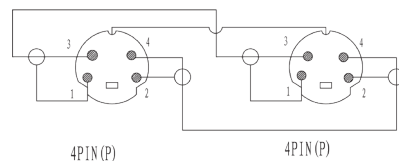

Designed in Germany

10 Years Warranty
High-Quality Assurance









OFC
99.99% Oxygen Free Copper

24 Carat Gold
Anti Resistance Connections

2x
Cable Shielding

S-video cable

flexible connection cable for demanding users

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70432	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: 0.10 Master carton: 5.00		4 040849 704321
70434	2.00	Single carton: 185 x 80 x 35 Master carton (30 pcs.): 425 x 270 x 235	Single carton: 0.16 Master carton: 5.80		4 040849 704345
70435	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: 0.26 Master carton: 7.70		4 040849 704352
70436	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: 0.37 Master carton: 10.50		4 040849 704369
70437	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: 0.52 Master carton: 12.40		4 040849 704376
70438	10.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: 0.64 Master carton: 15.40		4 040849 704383
70440	15.00	Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435	Single carton: 0.93 Master carton: 18.00		4 040849 704406
70441	20.00	Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435	Single carton: 1.19 Master carton: 22.80		4 040849 704413

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany