

Subwoofer-Kabel

Y-Cinch-Kabel für Aktiv-Subwoofer mit Stereo-Eingang

Hubraum ist durch nichts zu ersetzen - außer durch noch mehr Hubraum. Dieser Weisheit aus dem Motorenbau folgend, steht kraftvollen Bässen mit dem Y-Kabel nichts im Wege. Dank einem definierten Wellenwiderstand von 50 Ω , mehrfacher Signalschirmung, reiner Materialien und präziser Verarbeitung, klingen Subwoofer störungsfrei und wuchtig.

- 50 Ω definierter Wellenwiderstand
- reine Kupferleiter und 2-fach Schirmung für klare Signalqualität
- 24-Karat vergoldete Kontakte für minimale Übertragungswiderstände

Technische Daten

Anschlüsse	
Steckermaterial:	3-fach umspritztes PVC / ABS
Kontaktmaterial:	24-Karat-vergoldet
Schirmung:	ja
Anschluss 1, Typ:	CINCH-Stecker (RCA)
Anschluss 1, Steckerlänge (mm):	39,8
Anschluss 1, Steckerbreite (mm):	14,0
Anschluss 1, Steckerhöhe (mm):	14,0
Anschluss 2, Typ:	2 x CINCH-Stecker (RCA)
Anschluss 2, Steckerlänge (mm):	39,8
Anschluss 2, Steckerbreite (mm):	14,0
Anschluss 2, Steckerhöhe (mm):	14,0


Kabel	
Typ:	Rundkabel
Länge (m):	1 2 3 5 7,5 10 15 20
Material Innenleiter:	OFC (sauerstofffreies Kupfer)
Durchmesser Innenleiter (mm):	25 x 0,120
AWG:	23
Anzahl Schirmungen:	2 x
Typ 1. Schirmung:	Aluminium-Folie
Typ 2. Schirmung:	Kupfer-Geflecht 96 Adern x 0,12 mm Querschnitt
Material Außenmantel:	hochelastisches PVC
Durchmesser Außenmantel (mm):	6,0
Knickschutz:	beidseitig

Signalübertragung	
Übertragungsarten:	analoge Audiosignale
max. Bandbreite (MHz):	10,0
Kapazität (pF):	155
Wellenwiderstand (Ω):	50

Allgemein	
Betriebstemperatur von / bis ($^{\circ}\text{C}$):	-10 / +80
Garantie (Jahre):	10

clicktronic[®]
entertainment.
pure.


casual




CINCH-Stecker (RCA)




2 x CINCH-Stecker (RCA)

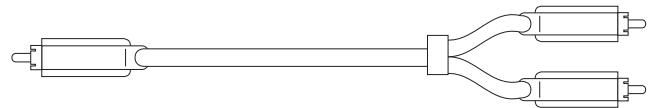

Kabelquerschnitt





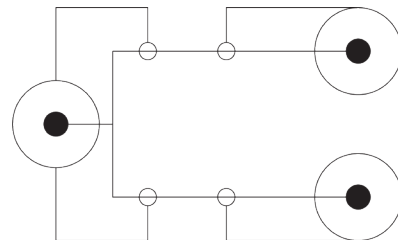





Schaltplan



Subwoofer-Kabel

Y-Cinch-Kabel für Aktiv-Subwoofer mit Stereo-Eingang

Artikelnr.	Kabellängen (m)	Verpackung (Maße in mm)	Gewicht (kg)	Abbildung	EAN Code
70454	1.00	Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235	Einzelkarton: 0.11 Export VPE: 6.00		4 040849 704543
70456	2.00	Einzelkarton: 185 x 80 x 35 Export VPE (30 Stk.): 400 x 270 x 235	Einzelkarton: 0.16 Export VPE: 5.80		4 040849 704567
70457	3.00	Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435	Einzelkarton: 0.25 Export VPE: 6.50		4 040849 704574
70458	5.00	Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435	Einzelkarton: 0.34 Export VPE: 8.70		4 040849 704581
70459	7.50	Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435	Einzelkarton: 0.47 Export VPE: 10.70		4 040849 704598
70460	10.0	Einzelkarton: 185 x 180 x 55 Export VPE (20 Stk.): 400 x 310 x 435	Einzelkarton: 0.57 Export VPE: 12.00		4 040849 704604
70462	15.00	Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435	Einzelkarton: 0.81 Export VPE: 14.60		4 040849 704628
70463	20.00	Einzelkarton: 185 x 180 x 75 Export VPE (16 Stk.): 400 x 335 x 435	Einzelkarton: 0.90 Export VPE: 18.00		4 040849 704635

TARIC-Code: 85444290900

Bei Clicktronic® werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI™-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI™-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI™ handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig

Subwoofer cable

Y-cinch cable for active subwoofer with stereo input

Displacement is irreplaceable - except by even more displacement. Following this wisdom originating from engine design, nothing stands in the way of powerful basses using the Y-cable. Due to a 50 Ω defined wave impedance, multiple signal shielding, pure materials, and precise workmanship subwoofers sound free of distortion and full of power.

- 50 Ω defined wave impedance
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications



Connections	
Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	RCA plug (RCA)
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	2 x RCA plug (RCA)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable	
Type:	double core round cable
Length (m):	1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	25 x 0.120
AWG:	23
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 96 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Kink protection:	on both sides


Signal transmission	
Transmission modes:	analog audio signals
max. Bandwidth (MHz):	10.0
Capacitance (pF):	155
Characteristic impedance (Ω):	50

General	
Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10


casual

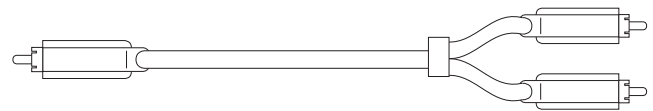

Cross section





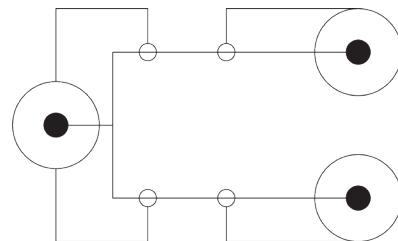





Wiring diagram



Subwoofer cable

Y- Cinch cable for active subwoofer with stereo input

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70454	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: 0.11 Master carton: 6.00		4 040849 704543
70456	2.00	Single carton: 185 x 80 x 35 Master carton (30 pcs.): 425 x 270 x 235	Single carton: 0.16 Master carton: 5.80		4 040849 704567
70457	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: 0.25 Master carton: 6.50		4 040849 704574
70458	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: 0.34 Master carton: 8.70		4 040849 704581
70459	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: 0.47 Master carton: 10.70		4 040849 704598
70460	10.0	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: 0.57 Master carton: 12.00		4 040849 704604
70462	15.00	Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435	Single carton: 0.81 Master carton: 14.60		4 040849 704628
70463	20.00	Single carton: 185 x 180 x 75 Master carton (16 pcs.): 400 x 335 x 435	Single carton: 0.90 Master carton: 18.00		4 040849 704635

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany